

Insulation Fault Locator, Measuring device of isolation W&W 3000

With that unit you can quickly and dependably localize the error in the insulation sector.

The unit is suitable for every type of insulation such as direct current voltage insulation, alternating voltage insulation and all other insulations.


The measurement can be carried out on an ongoing business, so that no feeder cables need to be removed. The W&W 3000 unit is characterized by robustness, a simple handling and an exact error-locating.

Technical features:

- Isolation error measuring to ca. 10 cm exact
- Insulation measurement AC & DC to 20 V
- Digital display with background lighting
- Battery tension control
- IP 54 case
- current supply 1 piece 9V battery
- Weight: 330g incl. Batteries
- Dimensions: B: 14cm, L: 8cm, T: 5cm
- Special measuring sensors and bag
- 1 year warranty



Measuring diagram of an example measurement

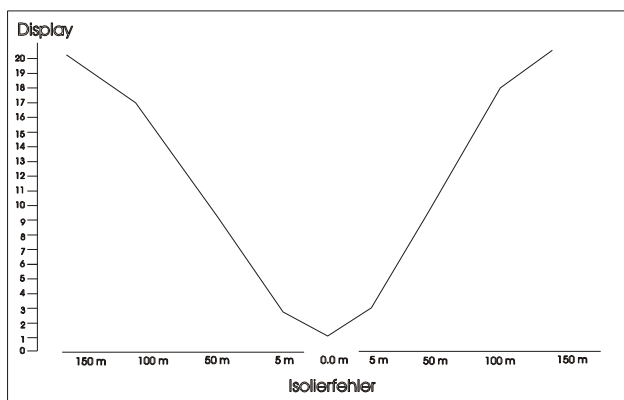

Fehlerdistanz m	Anzeige
0	1.62
0.2	1.69
0.5	1.79
1	1.93
2	2.27
5	3.35
10	4.72
20	6.57
30	8.37
40	9.02
50	10.08
70	15.52
90	17.24
100	17.58
120	18.87
150	19.91



Scope of delivery:

The W&W 3000 unit will be sent in a bag with special measuring sensors.

Net price: SFr. 2'795.-

Date of delivery: 2-6 weeks